


UWB 8060 Chip Antenna: ANT8060R5500A1M1

Application:

UWB indoor location, Smart Key, etc...

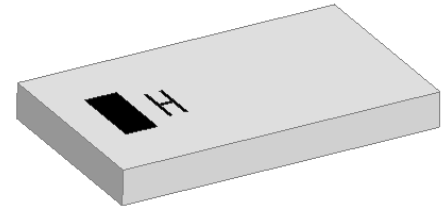

Features

SMD, high reliability, ultra compact, Omni-directional...

Part number

ANT 8060 R 5500 A1 M1
 (1) (2) (3) (4) (5) (6)


(1) Product Code	Chip Antenna
(2) Size Code	8.0x6.0mm
(3) Packing	Tape and reel
(4) Frequency	5.5GHz
(5) Series	A1
(6) Type	M1

Electrical Specification

Working Frequency Range	3500~8500 MHz
Peak Gain	3.5 dBi (Typ.)
Impedance	50 Ohm
VSWR	3.0 (Max)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40~85°C

The specification is defined on HEK EVB.

Dimension and Terminal Configuration

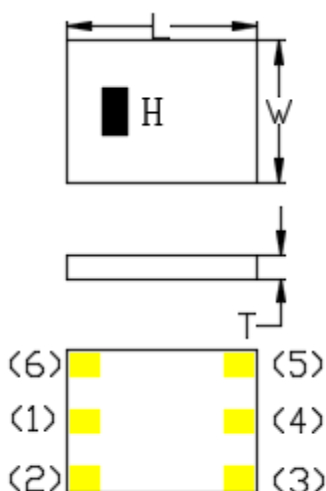


Dimension (mm)	
L	8.0±0.15
W	6.0±0.15
T	1.0±0.10

No.	Terminal Name
1	Feeding
2,3,4,5,6	Soldering


UWB 8060 Chip Antenna: ANT8060R5500A1M1

Evaluation Board Reference

PCB Dimension

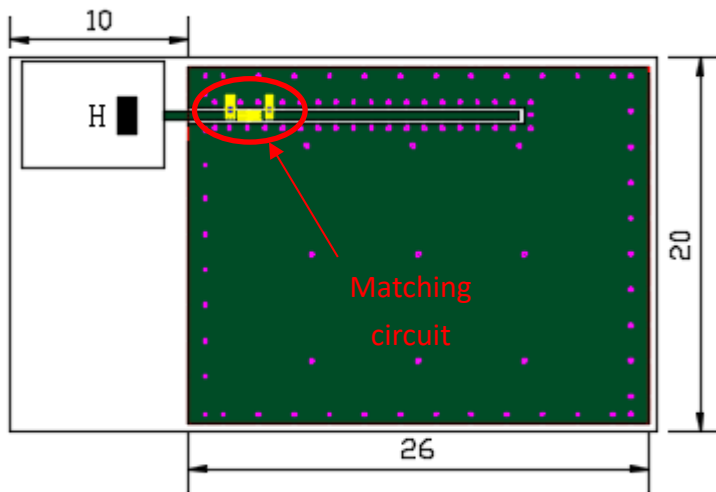

Antenna Layout Reference

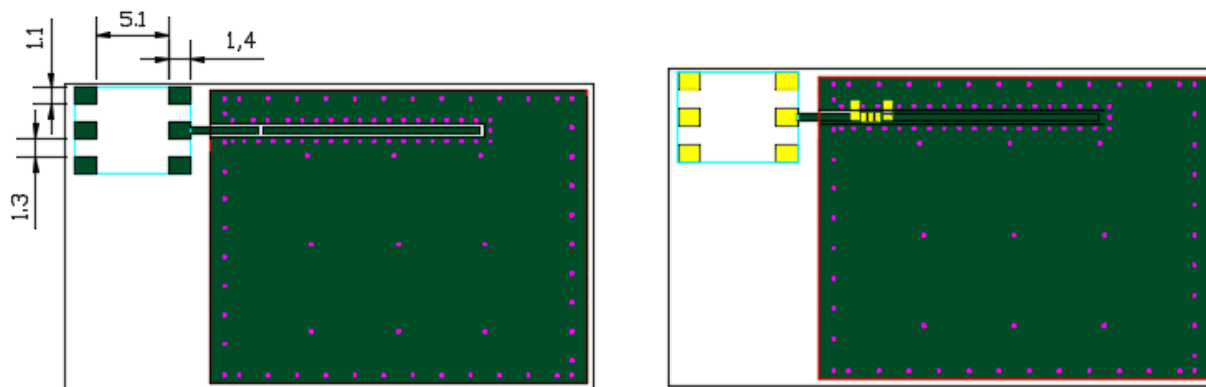

Unit : mm

 : Chip Antenna



 : Land Pattern

UWB 8060 Chip Antenna: ANT8060R5500A1M1


Electrical Characteristics

Return Loss & Radiation

VSWR&Efficiency

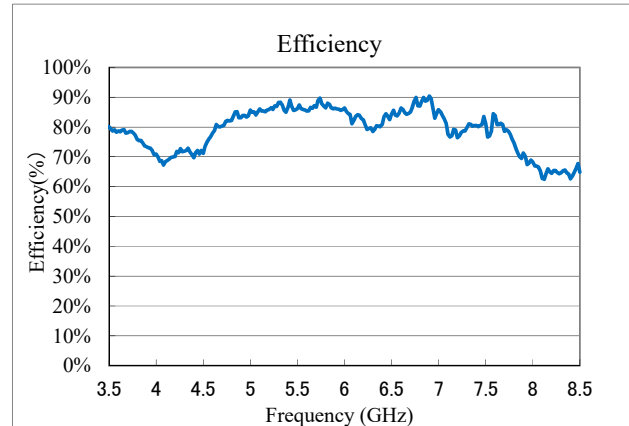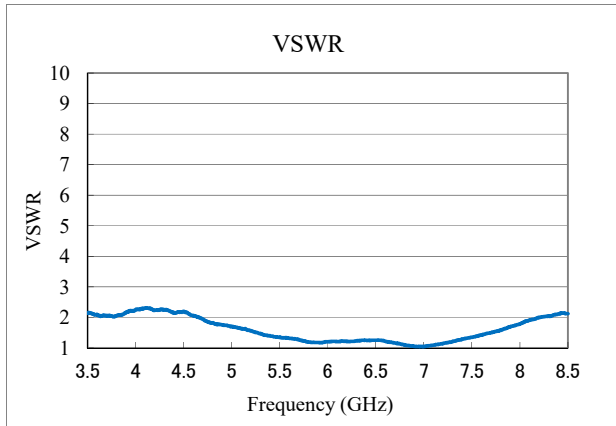


Radiation Pattern


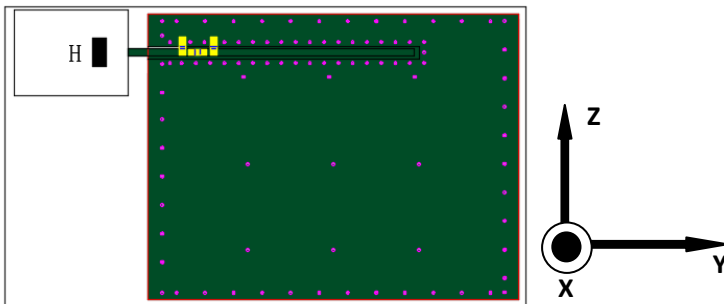


Frequency=5500MHz

ZX-Plane

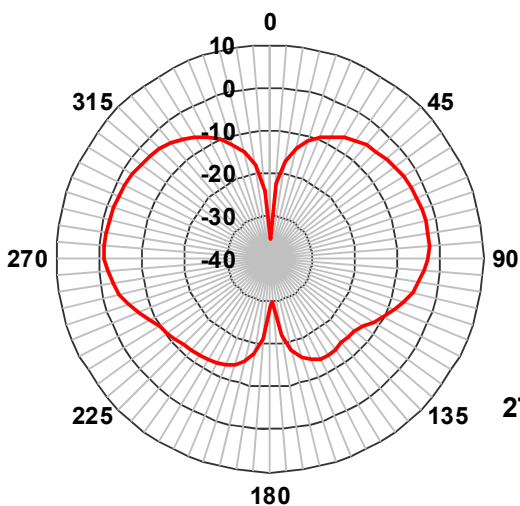


Horizontal Polarization

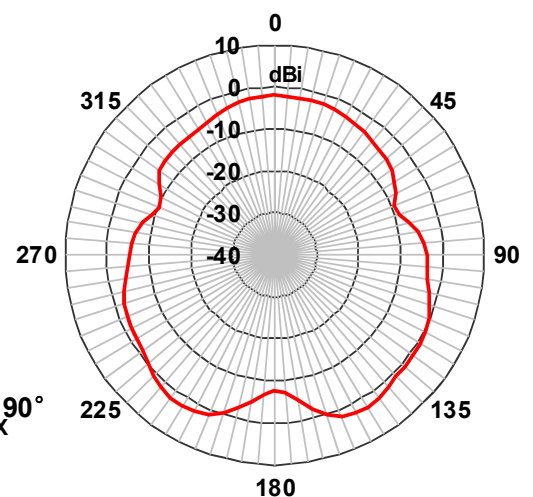



Vertical Polarization

UWB 8060 Chip Antenna: ANT8060R5500A1M1

ZY-Plane

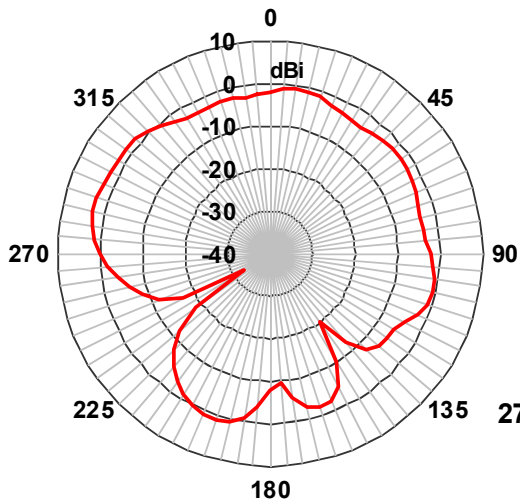


Horizontal Polarization

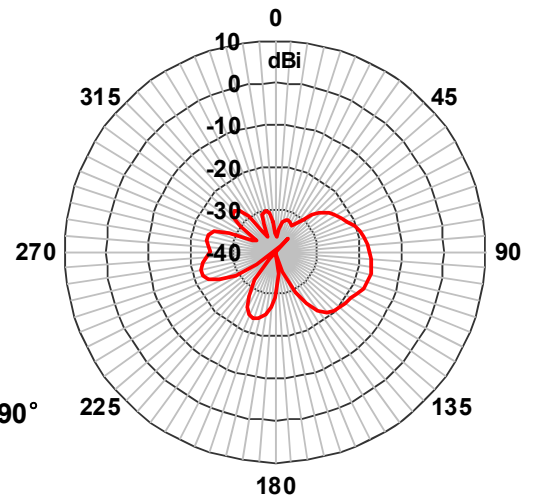



Vertical Polarization

XY-Plane

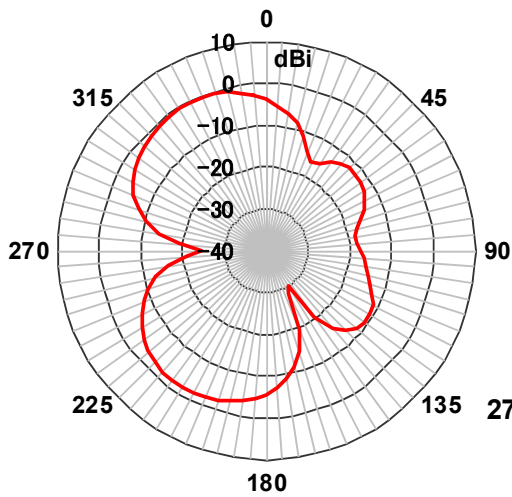

Horizontal Polarization

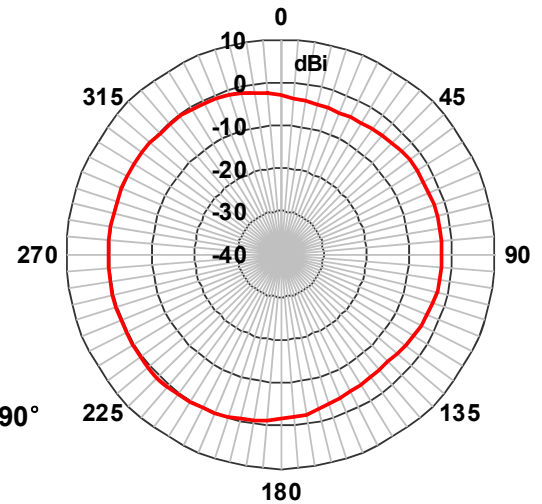


Vertical Polarization

UWB 8060 Chip Antenna: ANT8060R5500A1M1

Taping Specifications


Reel and Taping Specification

Reel Specification

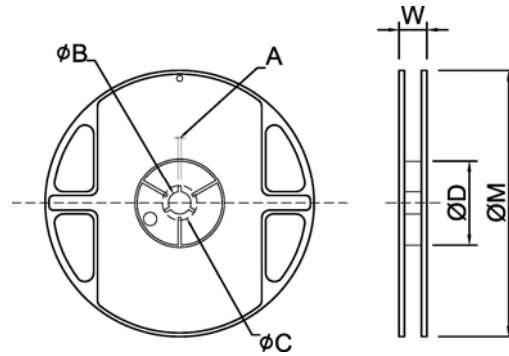

TYPE	SIZE		A	φ B	φ C	φ D	W	φ M
8060	13"	1K/Reel	2.0±0.5	13.0±1.0	21±1.0	67±1.0	20.5±2.0	178±2.0

Taping Specification

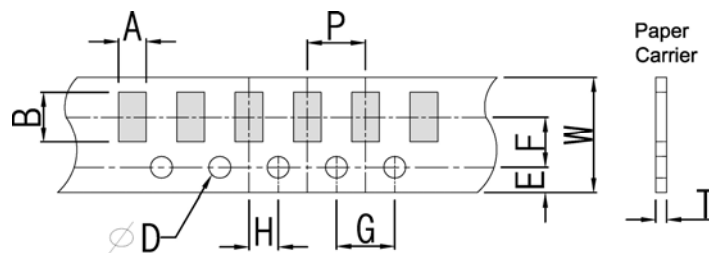


Packaging	Type	A	B	W	E	F	G	H	T	φD	P
Paper Type	8060	6.30±0.20	8.30±0.20	16.0±0.20	1.75±0.10	7.5±0.05	4.0±0.10	2.0±0.05	0.30±0.10	1.50±0.10	12±0.1

UWB 8060 Chip Antenna: ANT8060R5500A1M1

Recommended Reflow Profile

Pb free solder

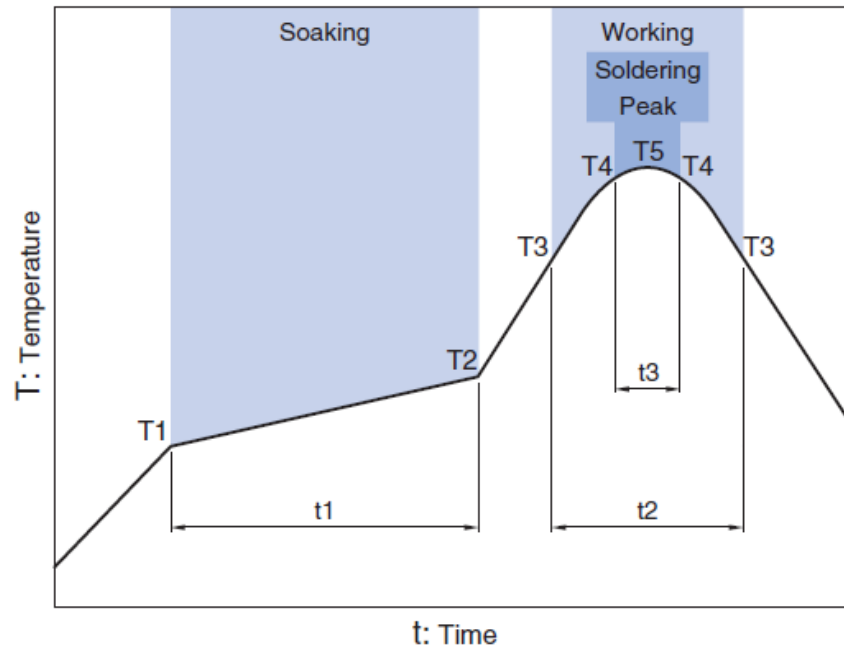

Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.

Revision History

Version	Date	Description
Ver.01	Apr.2023	New issue.